



Cellular Router Capabilities

LynxSpring's new Onyx 4G LTE Cellular Router is designed to support secure, remote access and the exchange of data among today's intelligent buildings, energy management systems, machine-to-machine applications, edge devices and cloud services.

LynxSpring has conveniently packaged our new easy-to-configure Cellular Router with our E2E Private Wireless Network and the E2E Easy Data Service Plan.

With the reliability, coverage, security and simplicity of our wireless data plan, the Onyx Cellular Router has been designed for simple set-up, installation, commissioning and includes a wireless modem interface allowing instant communication upon startup. Developed to be a drop-in or an OEM equipment deliverable product, the new Cellular Router provides remote access and data acquisition through enabling you to:

- ✓ Remotely monitor and control infrastructure and equipment, meters, pumps and valves in any energy, utility, commercial or industrial application.
- ✓ Instantly connect equipment at remote point-of-sale locations, temporary installations, or retail operations.
- ✓ Access to building and energy assets via a secure VPN.

Onyx 4G LTE Cellular Router Features

4G CAT1 MODEL

- ✓ LTE Bands B4 (1700), B13 (750)
- ✓ Download: up to 10 Mbps
- ✓ Upload: up to 5 Mbps
- ✓ Ethernet is standard

Carrier Approvals



The Onyx 4G LTE Cellular Router is tested and approved for deployment by Verizon.

Onyx[®] 4G LTE[™] Cellular Router

PRODUCT DATA SHEET

Made in USA

Dimensions

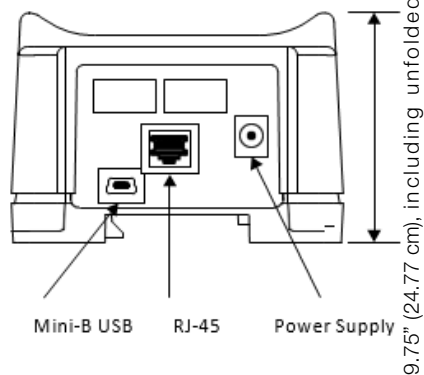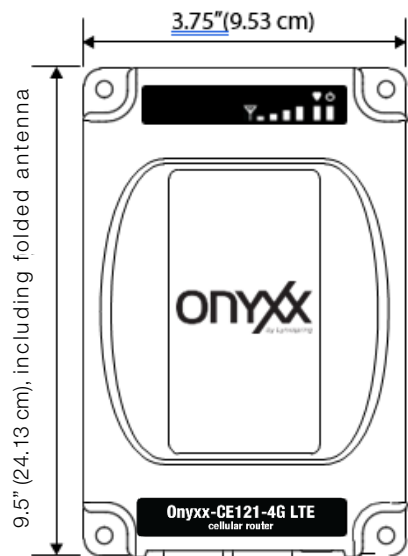

Specifications

PLATFORM	
Operating System	Helixx [®] Framework by Lynxspring [®]
Processor	1 GHz AM335x ARM Cortex A-8
Memory	512 MB DDR3L 800 MHz, 4 GB 8-bit Embedded MMC on-board Flash
COMMUNICATION PORTS	
Ethernet Port	10/100 Mbps (<i>RJ-45 Connector</i>)
Mini-B USB	USB Client Connector utilizes 5-pin mini-B USB cable
Antenna	2 SMA antenna connectors (<i>Primary</i>), active antenna support
PROTOCOLS	
Network	TCP/IP, UDP/IP, DNS (<i>pass-through</i>)
Routing	NAT, Host Port Routing, Reliable Static Route
Application	Telnet/SSH, SMTP, SNMP, SNTIP
CONNECTION	
Remote VPN Network	Port Forwarding
POWER	
Power Input	External 9 to 15 VDC 1A power supply
ENVIRONMENT	
Operating Temperature Range	0 – 60 °C (32 –140 °F)
Storage Temperature Range	0 – 70 °C (32 –158 °F)
Relative Humidity Range	5 – 95% RH, non-condensing
CERTIFICATIONS	
Compliance	FCC 47 Part 22 & 24, Complies with FCC47 Part 15 Class B, Industry Canada, CE, RoHS Compliant, Class 1 Div. 2.
RF Exposure/Specific Absorption Rate (SAR)	This product has been evaluated for SAR and meets the FCC Guidelines for exposure to radio waves
	FCC Equipment Authorization ID: QIPELS31-V
Ordering Information	
PART NUMBER(S)	DESCRIPTION
Onyx-CE121-4GLTE	Packaging will include: one (1) Onyx 4G LTE Cellular Router, one (1) 9 to 15 Vdc 1A external power supply, and one (1) 7 ft. Ethernet cable and two (2) direct-connect antennae.
OPTIONAL	
OX-CMA-3WR-12	Remote antenna with an ultra-wide band, cellular magnetic mount including a 3-foot cable

©2021 by Lynxspring, Inc. All rights reserved. The information and/or specifications published here are current as of the date of publication of this document. Lynxspring, Inc. reserves the right to change or modify specifications without prior notice. The latest product specifications can be found by contacting our corporate headquarters in Lee's Summit, Missouri. Products or features contained herein are covered by one or more United States or foreign patents. Other brand and product names are trademarks or registered trademarks of their respective holders. This document may be copied by parties who are authorized to distribute Lynxspring products in connection with distribution of those products, subject to the contracts that authorize such distribution. It may not otherwise, in whole or in part, be copied, photocopied, reproduced, translated, or reduced to any electronic medium or machine-readable form without prior written consent from Lynxspring, Inc. Complete Confidentiality, Trademark, Copyright and Patent notifications can be found at: lynxspring.com/company/legal.

Lynxspring[®], JENEsys[®], Onyx[®] and Helixx[®] are registered trademarks of Lynxspring, Inc. JENEsys Edge[™] is a trademark of Lynxspring, Inc.

Niagara Framework[®] is a registered trademark of Tridium, Inc.

LTE[™] is a trademark of ETSI.

2900 NE Independence Ave
Lees Summit, MO 64064
sales@lynxspring.com
1 (877) 649-5969


LYNXSPRING[®]
www.lynxspring.com

© 2021 Lynxspring, Inc.
All Rights Reserved
Revised 2/1/2021
Onyx-CE121-4GLTE-DS-V1.4